

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 997 389 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
03.05.2000 Bulletin 2000/18

(51) Int Cl.7: **B65D 71/50**

(21) Application number: 99307809.6

(22) Date of filing: 04.10.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Olsen, Robert**
Illinois 60157 (US)

(74) Representative: **Rackham, Stephen Neil**
GILL JENNINGS & EVERY,
Broadgate House,
7 Eldon Street
London EC2M 7LH (GB)

(30) Priority: 15.10.1998 US 173118

(71) Applicant: **ILLINOIS TOOL WORKS INC.**
Glenview, Illinois 60025 (US)

(54) Carrier

(57) This invention relates to a package (1) of a plurality of containers (5) unitized with a flexible carrier (10). The carrier (10) is constructed from a plastic planar sheet having a plurality of container receiving openings (20) including corner container receiving openings (25) and inner container receiving openings (40). A panel (50) is positioned with respect to a straight longitudinal

panel edge (55) of the container receiving openings (20). When the containers (5) are inserted into the container receiving openings (20), the panel (50) remains flat and tight with respect to the containers (5). The panel (50) is urged into a flat position with respect to the containers through a distinct spatial relationship between and among the container receiving openings (20).

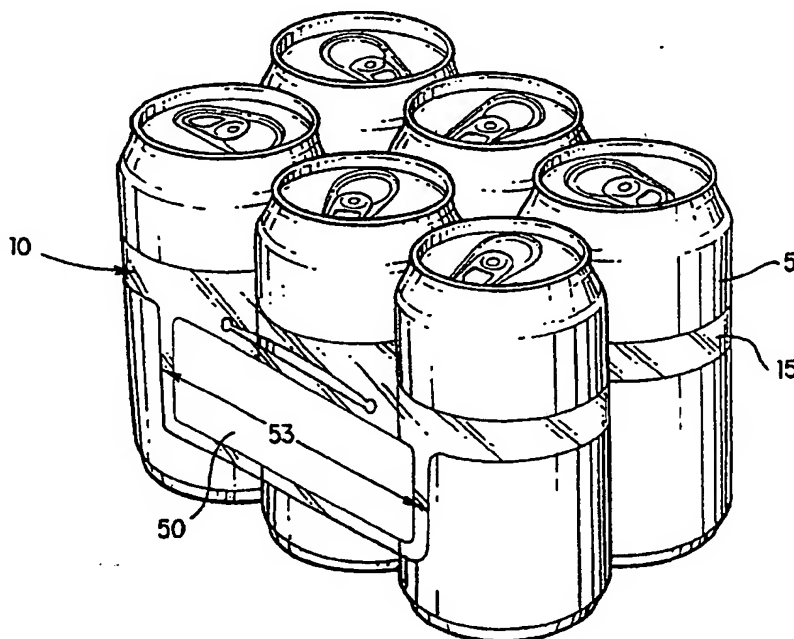


FIG. 2

Description

[0001] This invention relates to a carrier, for unitizing a plurality of containers, having a plurality of container receiving openings configured to allow an integral panel to remain in a flat and tight position with respect to the containers. It also relates to the resulting package.

[0002] Conventional container carriers are often used to unitize a plurality of similarly sized containers, such as cans, bottles, jars and boxes, although other packages or containers may be unitized. Plastic ring carriers and box carriers are two such conventional container carriers.

[0003] The plastic ring carrier produces a unitized package for containers using little material. However, when used alone has little or no advertising or promotional printing space. Conversely, the box carrier generally has a relatively large amount of area for promotional graphics. Disadvantageously, the box carrier requires a relatively large amount of material, permits bottles to fall out if it is not maintained in an upright position, and usually shrouds much of the actual containers. Therefore, there is a need for a package that incorporates the stability and economy of a ring carrier and the promotional area of a box carrier.

[0004] An object of this invention to provide a container carrier that unitizes a plurality of containers into a tight, solid package and yet also provides a panel for merchandising information.

[0005] According to this invention a carrier comprises:

a planar sheet of a plastic material, the sheet having a plurality of container receiving openings arranged in longitudinal rows and transverse ranks;

a corner container receiving opening of the container receiving openings located at an intersection between an outermost row of the longitudinal rows and an outermost rank of the transverse ranks, the corner container receiving opening having a first longitudinal length;

an inner container receiving opening of the container receiving openings located in an inner rank of the transverse ranks, the inner container receiving opening having a second longitudinal length;

a panel integrally formed with the sheet, the panel extending outward from a panel edge of the sheet; and,

the panel edge at least partially formed along a portion of each of the container receiving openings, the panel edge positioned in a longitudinal direction along a generally straight line.

[0006] An advantage of this invention is that it provides a container carrier that incorporates the stability and economy of a ring carrier and a promotional area like a box carrier.

[0007] Preferably a first longitudinal band is also formed between transversely adjacent corner container

receiving openings while a second longitudinal band is formed between transversely adjacent inner container receiving openings. The first longitudinal band is narrower than the second longitudinal band.

5 [0008] In addition to the above features, the carrier may also include an integral handle, an end web, a flap in the corner container receiving openings and a line of perforation formed within the carrier. Such features as described above result in a carrier configured to carry a plurality of containers.

10 [0009] The containers are positioned in each container receiving opening to form a package having a panel that is flat, tight and parallel with respect to the containers and prominent with respect to the package. Such a configuration of the panel results in a package of containers having a prominent display area or "billboard" for advertising, information, graphics and other marketing material.

15 [0010] Particular embodiments of carriers in accordance with this invention will now be described with reference to the accompanying drawings; in which:-

20 Fig. 1 is a top view of a carrier for holding six containers according to one preferred embodiment of this invention;

25 Fig. 2 is a perspective view of a package of containers using a carrier according to one preferred embodiment of this invention;

30 Fig. 3 is a top view of a carrier for holding six containers according to another preferred embodiment of this invention;

35 Fig. 4 is a top view of a carrier for holding eight containers according to one preferred embodiment of this invention; and

40 Fig. 5 is a top view of a carrier for holding twelve containers according to another preferred embodiment of this invention.

[0011] Figs. 1-5 show carrier 10 for carrying a plurality of containers 5. Containers 5 shown in Fig. 2 are preferably cans. Although cans are shown in Fig. 2, bottles or any other commonly unitized container 5 may be used with carrier 10 according to this invention. Containers 5 are preferably like-sized within a single carrier 10.

45 [0012] Carrier 10 unitizes a plurality of containers 5 to create package 1, such as package 1 shown in Fig. 2. Carrier 10 comprises planar sheet 15 preferably constructed from a flexible, resilient material such as plastic. In one preferred embodiment of this invention, sheet 15 is made from low density polyethylene. Sheet 15 preferably comprises two transverse edges 17 and two longitudinal edges 18.

50 [0013] Sheet 15 of material is preferably cut, using means known to those skilled in the art, such as a

stamping die, to form a plurality of container receiving openings 20 in sheet 15. Preferably, six or more container receiving openings 20 are formed in sheet 15 in longitudinal rows and transverse ranks. Preferably, container receiving openings 20 are configured in two rows of three ranks or in two rows of four ranks. Sheet 15 may include other configurations of container receiving openings 20 depending on the size of package 1 desired.

[0014] Container receiving openings 20 preferably comprise a plurality of corner container receiving openings 25 and a plurality of inner container receiving openings 40. Container receiving openings 20 are preferably longer in a longitudinal direction than wide in a transverse direction.

[0015] Corner container receiving openings 25 are located at an intersection between an outermost row of the longitudinal rows and an outermost rank of the transverse ranks. Each carrier 10 includes four corner container receiving openings 25 located at each of four corners of sheet 15. Corner container receiving openings 25 have a first longitudinal length 28. Corner container receiving opening 25 also includes outer corner 30 having first radius 33.

[0016] Inner container receiving openings 40 are located in an inner rank of the transverse ranks. Depending upon the capacity of carrier 10, sheet 15 preferably includes two or more inner container receiving openings 40. Inner container receiving openings 20 have a second longitudinal length 43. Inner container receiving openings 40 also include at least one corner, and preferably two corners, with second radius 45.

[0017] According to one preferred embodiment of this invention, first radius 33 is greater than second radius 45. Specifically, first radius 33 is preferably approximately $3/4"$ (18mm) or greater and second radius 45 is preferably approximately $1/4"$ (6mm).

[0018] In one preferred embodiment of this invention, panel 50 is integrally formed with sheet 15. Panel 50 preferably has an overall longitudinal panel length less than an overall length of longitudinal edge 18. Panel 50 preferably accommodates, on one or both sides, UPC and proof of purchase labels, graphics, and promotional and/or other information related to contents and/or ingredients of package 1. Panel 50 is preferably generally continuous and unbroken, without cutouts or apertures, throughout its defined area.

[0019] Panel 50 preferably extends outward from longitudinal edge 18 of sheet 15. Specifically, panel 50 preferably extends outward from panel edge 55 of sheet 15. As shown in Figs 1 and 3-5, panel edge 55 is at least partially formed along a portion of each container receiving opening 20 that is adjacent to panel 50. Panel edge 55 is preferably positioned in a longitudinal direction along a generally straight line. The generally straight line of panel edge 55 is formed to correspond to longitudinal length 53 of panel 50.

[0020] First longitudinal band 60 is preferably formed

between transversely adjacent corner container receiving openings 25. Second longitudinal band 65 is preferably formed between inner container receiving openings 40. In addition, transverse bands 68 are formed between each longitudinally adjacent container receiving opening 20. According to one preferred embodiment of this invention, first longitudinal band 60 is narrower than second longitudinal band 65.

[0021] In one preferred embodiment of this invention, shown in Fig. 4, carrier 10 further comprises end web 75 positioned at each of two transverse edges 17 of sheet 15. End web 75 preferably comprises a band of material extending between corner container receiving openings 25 along transverse edges 17 of sheet 15.

[0022] As shown in Figs. 1-3, in one preferred embodiment of this invention, carrier 10 comprises sheet 15 having six container receiving openings 20. In this preferred embodiment, first longitudinal length 28 of corner container receiving opening 25 is preferably greater than second longitudinal length 43 of inner container receiving opening 40. In alternative embodiments of this invention, first longitudinal length 28 of corner container receiving opening 25 is approximately equal to second longitudinal length 43 of inner container receiving opening 40.

[0023] As shown in Figs. 4 and 5, carrier 10 comprises sheet 15 having eight or more container receiving openings 20. In this preferred embodiment, second longitudinal length 43 is preferably greater than the first longitudinal length 28. In one preferred embodiment of this invention, second longitudinal length 43 is approximately 8% larger than first longitudinal length 28.

[0024] In a preferred embodiment of this invention shown in Figs. 3 and 5, carrier 10 further comprises integral handle 12 positioned along an opposite longitudinal edge 18 as panel edge 55 of sheet 15. Handle 12 is particularly important in configurations of carrier 10 that contain many container receiving openings 20 to facilitate ease of handling of package 1.

[0025] As shown in Fig. 2, container 5 is positioned in each container receiving opening 20 to form package 1. Panel 50 is preferably flat and parallel with respect to containers 5 and prominent with respect to package 1. If panel 50 is curled or folded in a perpendicular position with respect to package 1, then advertising or other material positioned on panel will not be legible to a consumer. In addition, a panel 50 that protrudes with respect to package 1 will create difficulties in packaging, handling and stacking packages 1 because of interference between panels 50 of adjacent packages 1 and between panel 50 and packaging equipment.

[0026] Several of the above described features of carrier 10 facilitate a flat and prominent panel 50 with respect to package 1. For example, the generally straight line formed by panel edge 55 urges panel 50 into a generally flat position with respect to containers 5 in package 1. In addition, the relative difference between first longitudinal length 28 of corner container receiving

openings 25 and second longitudinal length 43 of inner container receiving openings 40, thereby creating an irregular longitudinal pitch between container receiving openings 20, also aids in the relative flatness of panel 50 with respect to package 1.

[0027] The relative difference in width between first longitudinal band 60 and second longitudinal band 65 also creates a tighter unitized block of containers 5 within package 1, specifically at transverse edges 17 where panel 50 is most likely to curl. The result of a tight unitized block of containers 5 is a flat panel 50 with respect to package 1.

[0028] In one preferred embodiment of this invention, shown in Fig. 4, sheet 15 further comprises flap 70 positioned in transverse band 68 adjacent one or more corner container receiving opening 25. Flap 70 is preferably positioned along one transverse band 68 adjacent corner container receiving opening 25. Flap 70 functions as a shim between container 5 and corner container receiving openings 25 thereby allowing transverse band 68 to fold at band slit 69 which further urges panel 50 into a flat position.

[0029] According to one preferred embodiment shown in Figs. 1 and 3-5, carrier 10 further comprises at least one line of perforation 80 adjacent container receiving opening 20. Lines of perforation 80, preferably in combination with removal slits 85, are preferably positioned from an external edge of sheet 15, such as transverse edge 17, to an edge of container receiving opening 20. Therefore, when line of perforation 80 is separated, container 5 is more easily removable from carrier 10.

Claims

1. A carrier (10) for carrying a plurality of containers, the carrier comprising:

a planar sheet of a plastic material, the sheet having a plurality of container receiving openings (20) arranged in longitudinal rows and transverse ranks;

a corner container receiving opening (25) of the container receiving openings located at an intersection between an outermost row of the longitudinal rows and an outermost rank of the transverse ranks, the corner container receiving opening (25) having a first longitudinal length (28);

an inner container receiving opening (40) of the container receiving openings located in an inner rank of the transverse ranks, the inner container receiving opening (40) having a second longitudinal length (43);

a panel (50) integrally formed with the sheet, the panel (50) extending outward from a panel edge (55) of the sheet; and,

the panel edge (55) at least partially formed along a portion of each of the container receiving openings (20), the panel edge (55) positioned in a longitudinal direction along a generally straight line.

2. A carrier according to Claim 1, having a first longitudinal band (60) between the corner container receiving openings (25) and a second longitudinal band (65) between the inner container receiving openings (40).

3. A carrier according to Claim 2, wherein the first longitudinal (60) band is narrower than the second longitudinal band (65).

4. A carrier according to Claim 1, wherein the corner container receiving opening has an outer corner (33) with a first radius, wherein the inner container has at least one corner (45) with a second radius, and wherein the first radius is greater than the second radius.

5. A carrier according to any one of the preceding claims, wherein the sheet further comprises a flap (70) positioned in the corner container receiving opening (25).

6. A carrier according to any one of the preceding claims, wherein a longitudinal panel length (53) is less than a longitudinal sheet length.

7. A carrier according to any one of the preceding claims, further comprising an end web (75) positioned at each of two transverse edges of the sheet.

8. A carrier according to any one of the preceding claims, further comprising a line of perforations (80) adjacent the container receiving openings (20).

9. A carrier according to any one of the preceding claims, further comprising an integral handle (12) positioned along an opposite edge of the sheet from the panel (50).

10. A carrier according to any one of the preceding claims, wherein the sheet has six container receiving openings (20) and wherein the first longitudinal length is greater than the second longitudinal length.

11. A carrier according to any one of claims 1 to 9, wherein the sheet has eight container receiving openings (20) and wherein the second longitudinal length is greater than the first longitudinal length.

12. A package comprising a carrier in accordance with any one of the preceding claims in combination with

a number of containers (5), one being located in each of the container receiving apertures 20, the panel (50) lying flat and lightly against the containers (5).

5

10

15

20

25

30


35

40

45

50

55

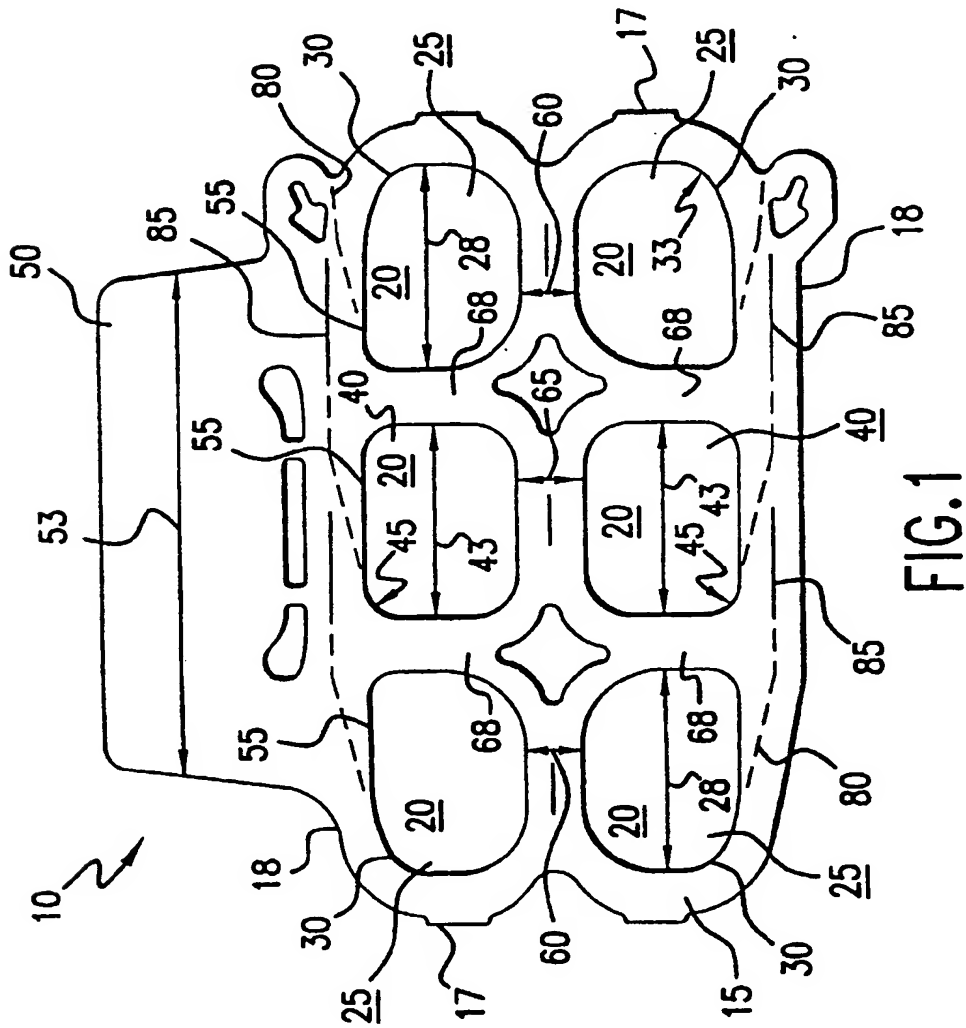

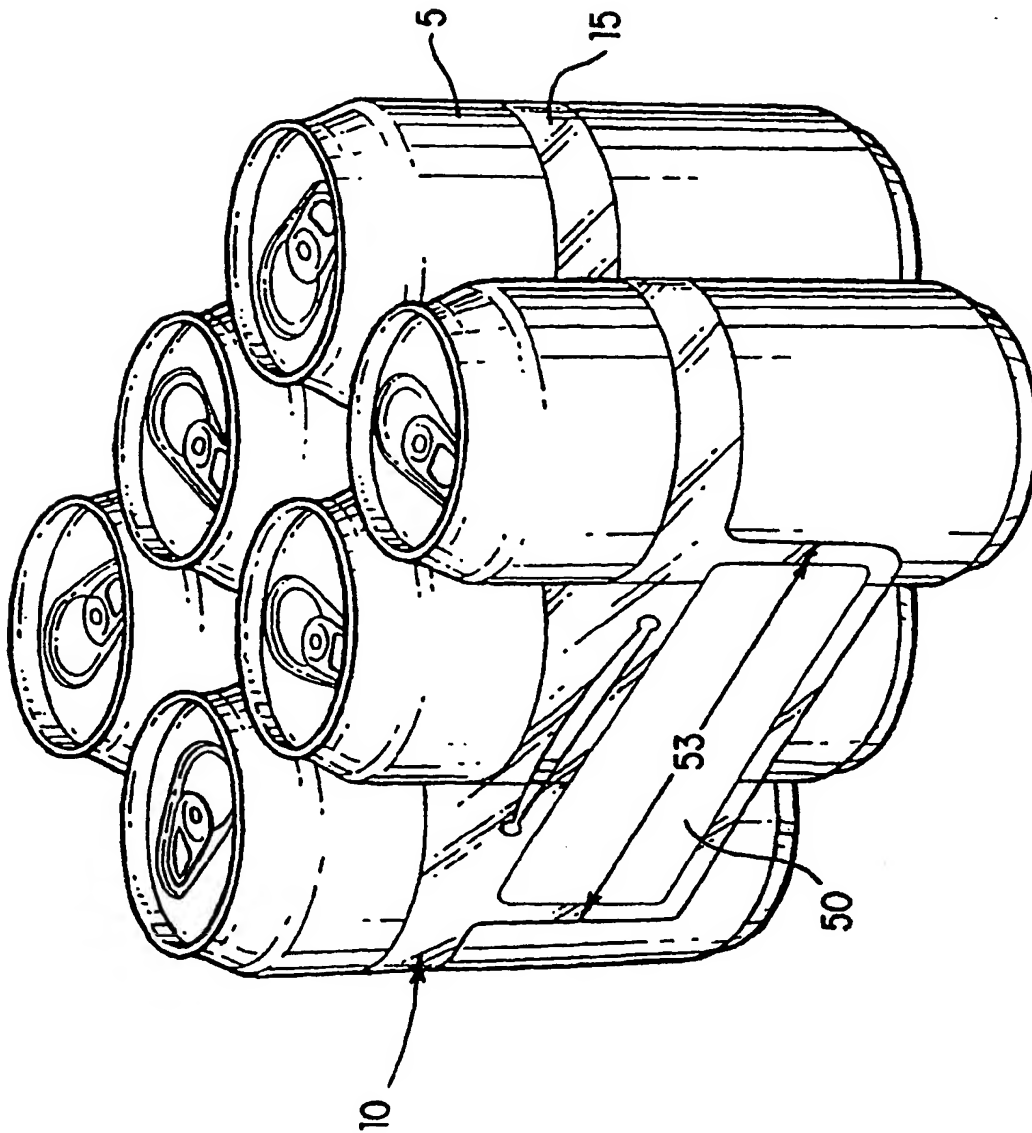


FIG. 2

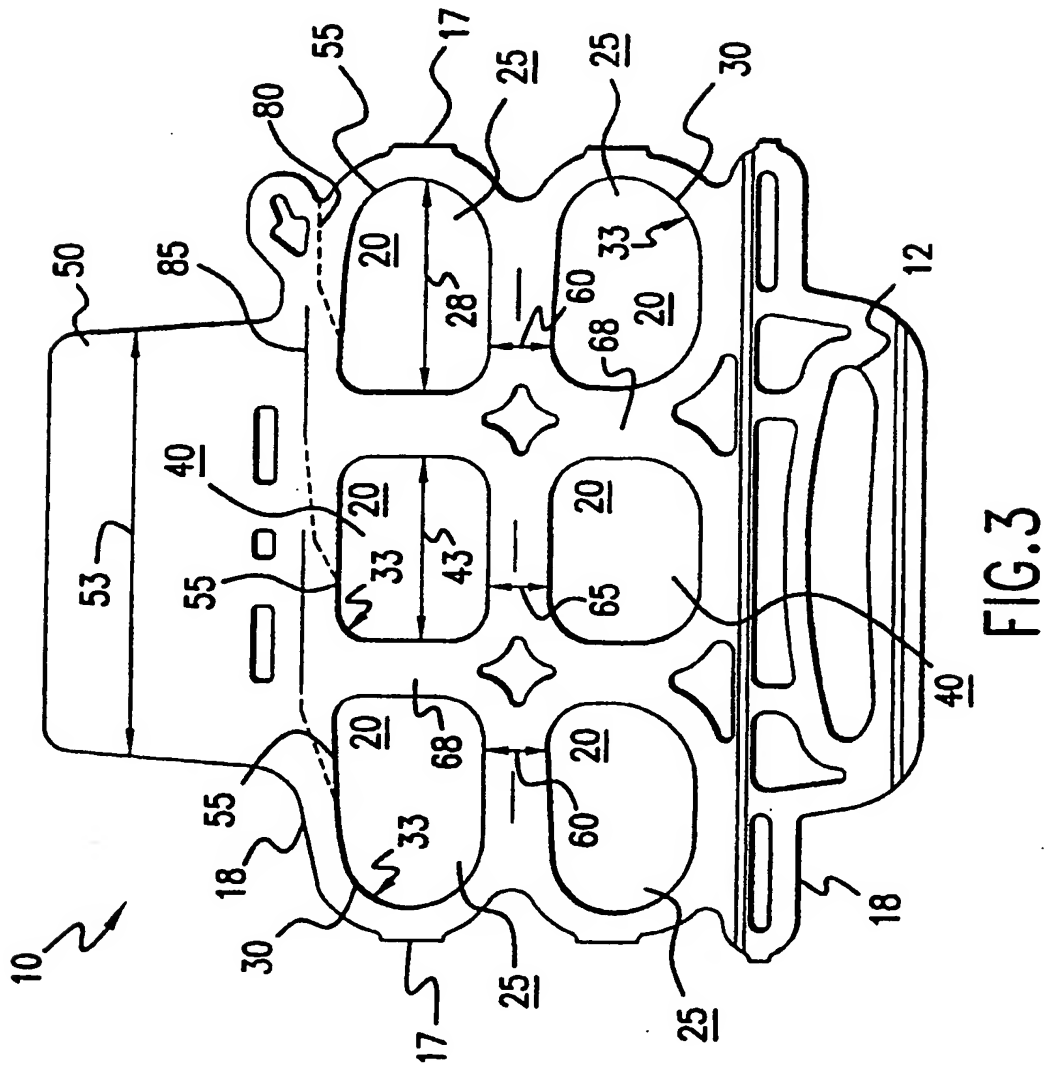


FIG. 3

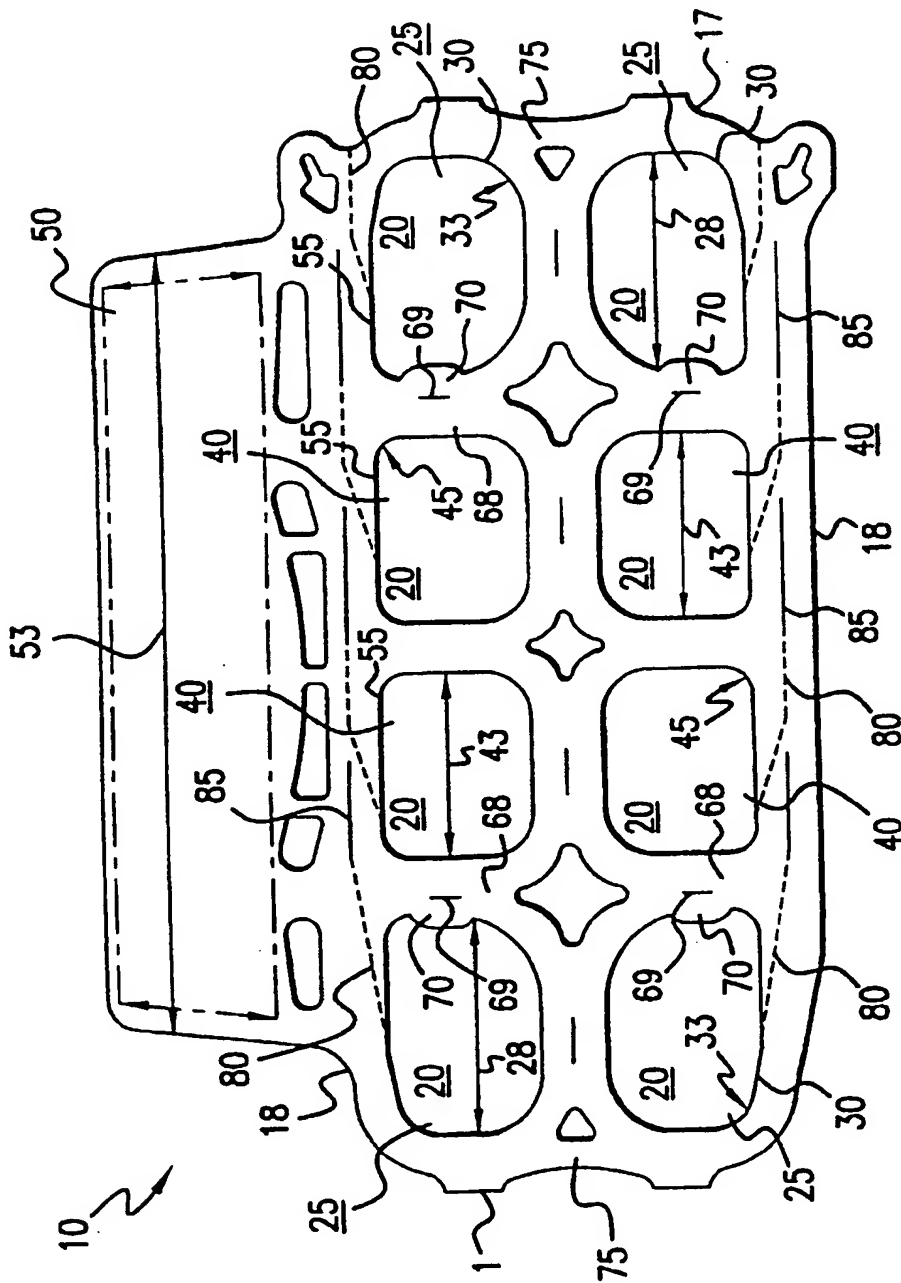


FIG. 4

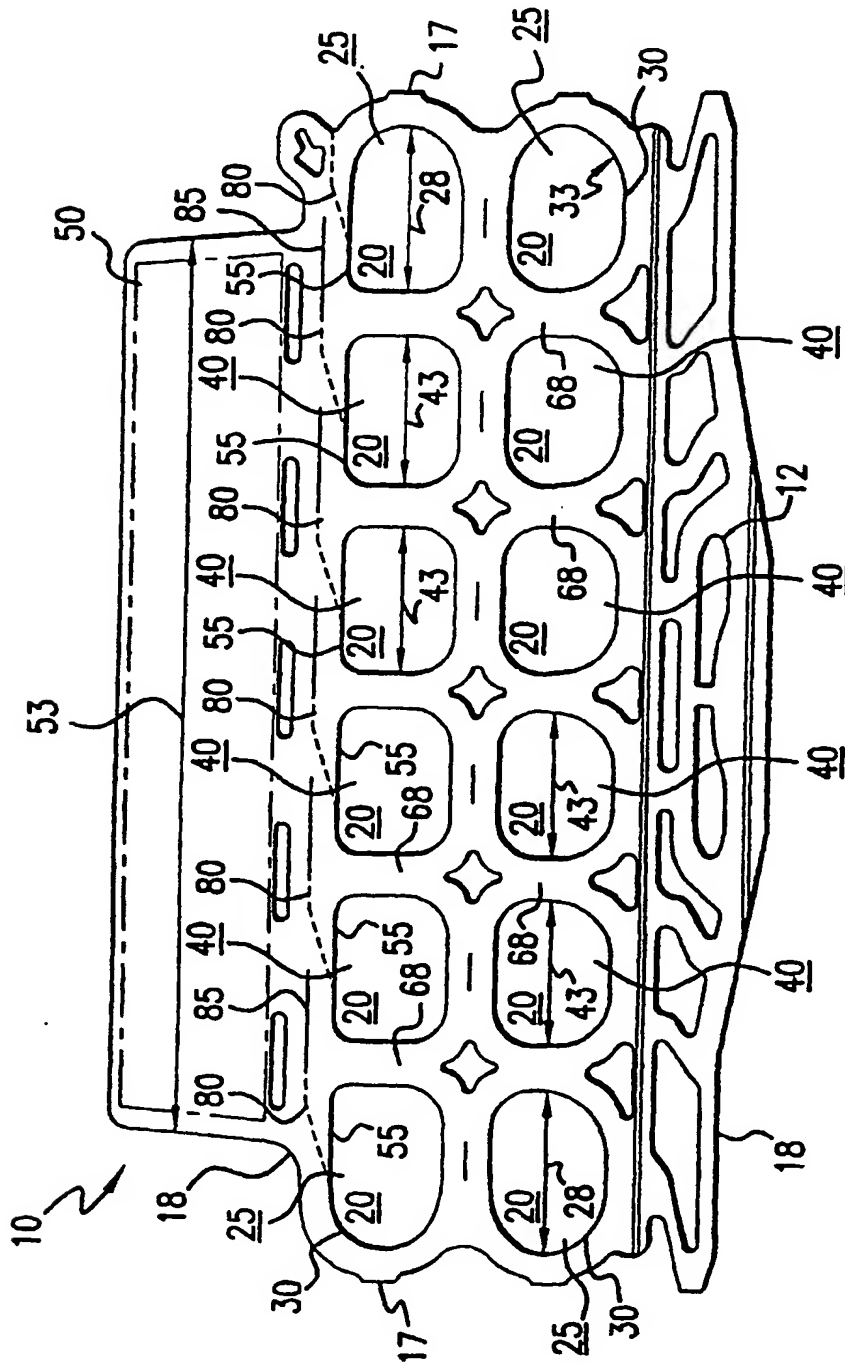


FIG. 5

EP 0 997 389 A1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 7809

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 507 479 A (ILLINOIS TOOL WORKS) 7 October 1992 (1992-10-07) * figures 1-3 *	1-3, 5-8, 10-12	B65D71/50
X	EP 0 838 408 A (ILLINOIS TOOL WORKS) 29 April 1998 (1998-04-29) * column 3, line 26 - column 4, line 57; figures 1, 2 *	1	
A	EP 0 503 821 A (ILLINOIS TOOL WORKS) 16 September 1992 (1992-09-16) * figures 1-3 *	1	
A	US 5 474 173 A (HODAPP) 12 December 1995 (1995-12-12) * claim 1; figure 4 *	1	
A	EP 0 509 813 A (ILLINOIS TOOL WORKS) 21 October 1992 (1992-10-21) * figures 1, 2 *	1	
A	US 5 642 808 A (MARCO) 1 July 1997 (1997-07-01)		<div>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</div> <div>B65D</div>
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 29 February 2000	Examiner Berrington, N
<div>CATEGORY OF CITED DOCUMENTS</div> <div> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document </div>			

EPF FORM 1503 03.92 (P04/01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 7809

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-02-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0507479 A	07-10-1992	US 5139137 A	18-08-1992
		AT 125228 T	15-08-1995
		AU 632726 B	07-01-1993
		AU 1317892 A	15-10-1992
		CA 2064174 A,C	03-10-1992
		CN 1065435 A,B	21-10-1992
		DE 69203506 D	24-08-1995
		DE 69203506 T	21-12-1995
		DK 507479 T	27-11-1995
		ES 2075612 T	01-10-1995
		FI 921410 A	03-10-1992
		GR 3017424 T	31-12-1995
		HK 185495 A	15-12-1995
		IE 69328 B	04-09-1996
		JP 1919614 C	07-04-1995
		JP 5124677 A	21-05-1993
		JP 6049503 B	29-06-1994
		KR 9500590 B	26-01-1995
		MX 9201294 A	01-10-1992
		NO 302807 B	27-04-1998
EP 0838408 A	29-04-1998	NZ 242173 A	27-04-1995
		US 5115910 A	26-05-1992
		US 5261530 A	16-11-1993
		US 5762193 A	09-06-1998
		AU 687330 A	19-02-1998
EP 0503821 A	16-09-1992	BR 9705287 A	14-09-1999
		JP 10297668 A	10-11-1998
		NO 974873 A	24-04-1998
		NZ 328812 A	19-12-1997
		AT 133132 T	15-02-1996
		AU 1124792 A	01-10-1992
		DE 69207619 D	29-02-1996
		DE 69207619 T	11-07-1996
		DK 503821 T	13-05-1996
		ES 2083081 T	01-04-1996
		FI 921051 A	15-09-1992
		GR 3018755 T	30-04-1996
		HK 89196 A	31-05-1996
		IE 73258 B	21-05-1997
		JP 1919613 C	07-04-1995
		JP 5097157 A	20-04-1993
		JP 6049502 B	29-06-1994
		NO 302808 B	27-04-1998
		NZ 241951 A	27-09-1994

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 7809

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-02-2000

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5474173	A	12-12-1995	NONE	
EP 0509813	A	21-10-1992	AT 134582 T	15-03-1996
			AU 650118 B	09-06-1994
			AU 1484292 A	26-11-1992
			CA 2065974 A,C	18-10-1992
			CN 1065837 A,B	04-11-1992
			DE 69208501 D	04-04-1996
			DE 69208501 T	08-08-1996
			DK 509813 T	08-07-1996
			ES 2084278 T	01-05-1996
			FI 921580 A	18-10-1992
			GR 3019140 T	31-05-1996
			HK 117396 A	12-07-1996
			IE 74390 B	30-07-1997
			JP 2003311 C	20-12-1995
			JP 5132075 A	28-05-1993
			JP 7025385 B	22-03-1995
			KR 9500591 B	26-01-1995
			NO 180292 B	16-12-1996
			NZ 242366 A	28-08-1995
			SG 44368 A	19-12-1997
			US 5174441 A	29-12-1992
US 5642808	A	01-07-1997	AT 179143 T	15-05-1999
			AU 679156 A	19-06-1997
			BR 9700251 A	27-10-1998
			CA 2193191 A	29-08-1997
			CN 1170685 A	21-01-1998
			DE 69700187 D	27-05-1999
			DE 69700187 T	05-08-1999
			EP 0792819 A	03-09-1997
			ES 2129997 T	16-06-1999
			JP 9226827 A	02-09-1997
			NZ 314290 A	19-12-1997